

iVu Series



Vision Sensor

- Configure in minutes with or without a PC
- Perform more inspections with fewer devices
- All-in-one solution with sensor, lens, and light



The simplicity of a photoelectric sensor and the intelligence of a smart camera


All-inclusive vision sensor with lens, light, I/O and touch screen programming




Simple setup from anywhere



Ability to change parameters on the fly saves valuable time without needing to stop and restart the inspection

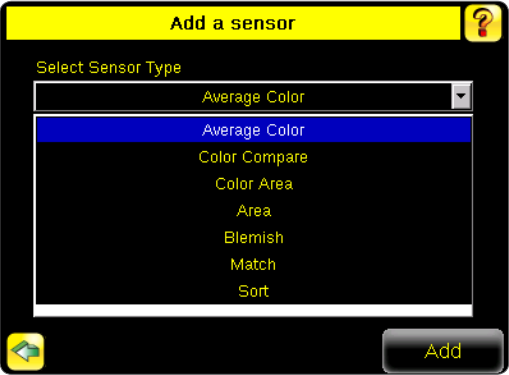


Application flexibility with the ability to add up to nine sensors per inspection and 30 inspections per iVu

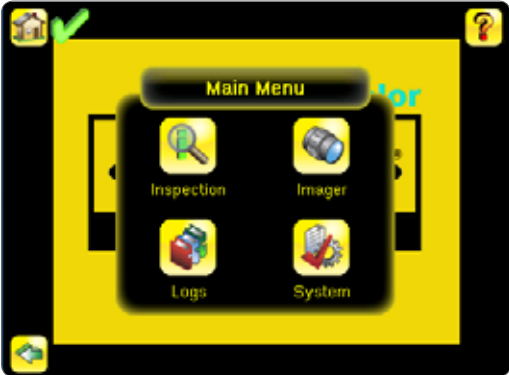

Quickly set up your inspection with intuitive menus

Real time feedback to determine the mode of failure for an application

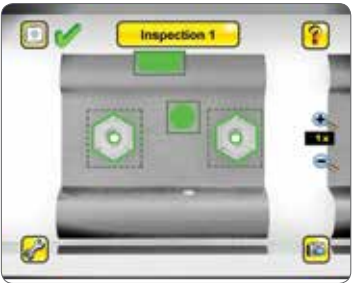



iVu Color Sensor




Used to monitor parts for color or color variations in addition to type, size, orientation or position

Average Color

Reports the average color of a part


- Monitor ink color changes over time
- Provide color information for part sorting
- Verify trim pieces in automotive assembly



Color Area

Verifies a feature, or multiple features, are the correct color and present on a part


- Verify a wire placement and color
- Label verification based on color
- Verify the color and correct number of bottles in a case

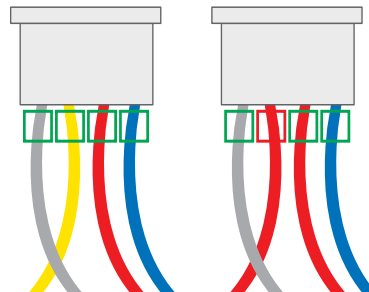

Color Compare

Verify that a part matches its reference color

- Confirm label color on a package
- Verify color of a bottle cap
- Check stain color on wood





iVu Vision Sensor




Used to monitor parts for type, size, orientation or position



Match

Verifies a pattern, shape or orientation is correct


- Verifies orientation and that the correct label is applied
- Weld nut orientation inspection
- Validate shape of parts



Area

Verifies a feature, or multiple features, are present on a part


- Blister pack inspection
- Count holes on a stamped part
- Verify complete assembly of a filter



Blemish

Finds areas of high contrast in the image

- Detect foreign material on a web
- Confirm presence of text on a container
- Verify safety seal on a cap



Sort

Recognizes and sorts different patterns of parts

- Identify and sort parts on a production line
- Confirm the correct parts are in a medical kit



iVu Barcode Reader (BCR)



Barcode reading capabilities for traceability applications

2D Bar Codes

- Data Matrix (ECC200)
- QR & Micro QR

1D Bar Codes

- Code 128
- Code 39
- Code 93
- Codabar
- DataBar
- Interleaved 2 of 5
- EAN-13 (UPC-A)
- EAN-8
- UPC-E
- IMB
- PDF417
- Postnet
- Pharmacode





Build Your iVu

Series	Touch Screen	Sensor Type	Ring Light Color	Lens (mm)
IVU2P	T	G	R	04
	T = Integrated R = Remote*	C = Color† G = Grayscale B = Barcode	R = Red B = Blue G = Green W = White I = Infrared 6 = UV365 9 = UV395 XC = C-mount** X = No Ring Light	04 = 4.3 06 = 6 08 = 8 12 = 12 16 = 16 25 = 25 Blank = No lens (only C-Mount)

* Remote display or PC is required for set up and viewing of Remote Touch Screen sensors

** Requires C-mount lens

† Color sensor only available in white, C-mount or no ring light




Machine-Mountable Remote Display

Description	Model
3.5" diagonal remote touch screen — for programming and monitoring	RDM35

Banner Vision Manager makes it quick and easy to setup any iVu Series vision sensor. It features an intuitive operating environment that users of all experience levels can easily navigate. Go to www.bannerengineering.com/vision-manager

iVu Lens Chart

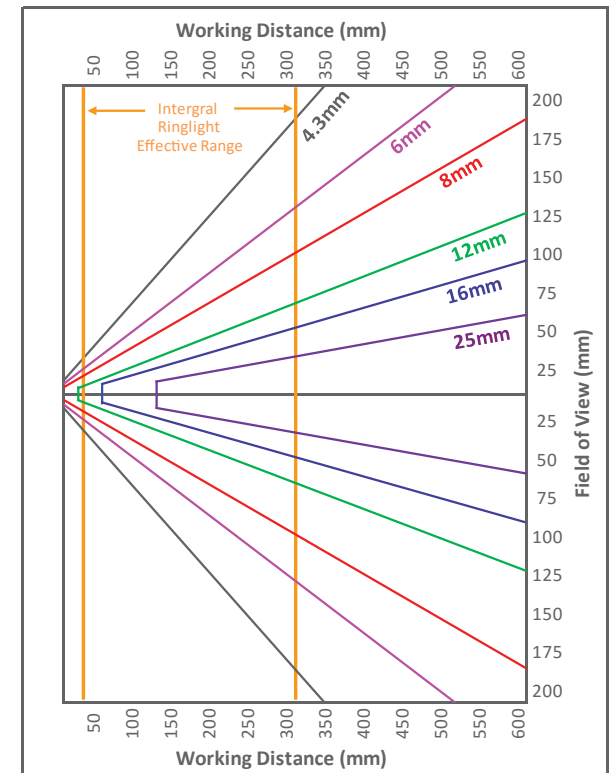

* When set to max FOV

Lenses

Additional interchangeable lenses available for application flexibility



Description	Model
4.3 mm	LMF04
6 mm	LMF06
8 mm	LMF08
12 mm	LMF12
16 mm	LMF16
25 mm	LMF25

Filter Kits[†]

Optional accessory used to create additional contrast



Description	Model
Red	FLTMR2
Blue	FLTMB
Green	FLTMG
Infrared	FLTMI*

* Infrared pass filters are preinstalled on infrared ring light models.

† Filter kits include 1 color and two sizes of filter holders.

C-Mount Standard Lenses

Required accessory for C-Mount sensor



Description	Model
4 mm	LCF04
8 mm	LCF08
12 mm	LCF12
16 mm	LCF16
25 mm	LCF25R
50 mm	LCF50L2R
75 mm	LCF75LR

C-Mount Lens Covers

Provides IP67 rating for C-Mount sensor



Description	Model
50 mm	IVUSLC50-P
75 mm	IVUSLC75-P

Cordsets

Power
Required



M12/Euro-Style with Shield
Straight connector models listed; for right-angle, add **RA** to the end of the model number (example, **MQDC2S-1206RA**)

12-Pin
MQDC2S-1206
2 m (6.5')
MQDC2S-1215
5 m (15')
MQDC2S-1230
9 m (30')
MQDC2S-1250
15 m (50')

Ethernet
Required for Ethernet communications



RJ45 to 4-Pin Pico QD

4-Pin

IVUC-E-406
2 m (6.5')
IVUC-E-415
5 m (15')
IVUC-E-430
9 m (30')

IVUC-E-450
12 m (50')
IVUC-E-475
23 m (75')

USB

Used to update firmware and access sensor files



4-Pin Pico

PSG-4M-4005-USB
0.15 m (0.5')
PSG-4M-401-USB
0.3 m (1')
PSG-4M-403-USB
0.9 m (3')
PSG-4M-410-USB
3 m (10')

Straight connector models listed

Machine Mountable Remote Display
Required for use of RDM35 remote display



8-Pin

Double-ended M12 Euro Style
Straight connector models listed; for right-angle, add **RA** to the end of the model number (example, **IVURDM-QD-803RA**)

IVURDM-QD-803
1 m (3')
IVURDM-QD-806
2 m (6')
IVURDM-QD-815
5 m (15')
IVURDM-QD-830
9 m (30')
IVURDM-QD-850
16 m (50')

Brackets



SMBIVURAL
Stainless steel left mount right-angle bracket




SMBIVURAR
Stainless steel right mount right-angle bracket



SMBIVUU
Stainless steel U-shaped swivel bracket



SMBRDM35
Docking station for machine mountable remote display

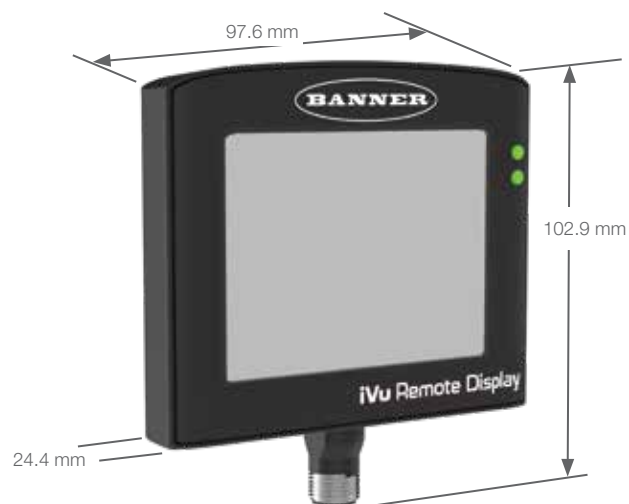

Specifications

Power Requirements	Voltage: 10 to 30 V dc Current: 1 A maximum (exclusive of I/O load)		
Connections	USB 2.0 Host: 4-pin Pico (M8) female connector Ethernet: 4-pin Pico (M8) male connector Power: 12-pin (M12) Euro male connector		
Communications	Ethernet (10/100 Mbps), Serial RS-232		
Ethernet Protocols	EtherNet/IP™, Modbus/TCP, PROFINET®		
Output Configuration	3 software selectable NPN or PNP, Strobe Out		
Output Rating	150 mA		
External Strobe Output	+5 V dc		
Acquisition	60 fps (frames per second)		
Exposure Time	0.1 ms to 1.049 s		
Imager	1/3 inch CMOS 752 × 480 pixels; adjustable Field of View (FOV)		
Lens Mount	Micro Video Lens models: M12 × 1 mm thread C-Mount models: Standard C-mount		
Construction	Housing: Black PBT Back Cover: Die-cast zinc Window: Acrylic		
Environmental Rating	IEC IP67; C-mount models require lens cover		
Operating Conditions	Integrated models: 0 to +45 °C (+32 to +113 °F) Remote models: 0 to +40 °C (+32 to +104 °F)		
PC Requirements	Microsoft Windows version 7,8 or 10		
Vision Sensor Capabilities	iVu Match Area Blemish Sort	iVu BCR 1D codes 2D codes	iVu Color Average Color Color Compare Color Area Match (grayscale only) Area (grayscale only) Blemish (grayscale only) Sort (grayscale only)
Certifications			



PN 205332 rev. B

© 2019 Banner Engineering Corp. Minneapolis, MN USA

This product includes software developed by the University of California, Berkeley and its contributors

1-888-373-6767

www.bannerengineering.com

