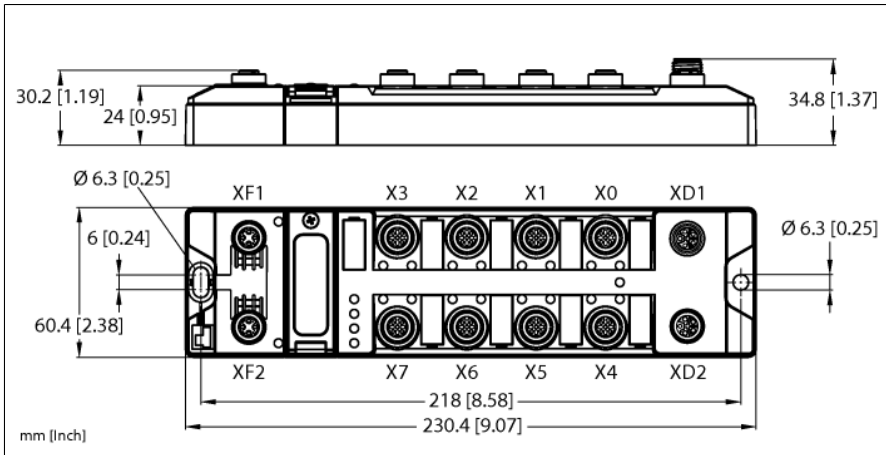


PRELIMINARY

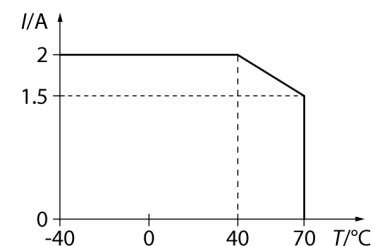
Compact and Secure Ethernet I/O Module Safe Digital Inputs and Outputs M12 L-Coded Voltage Connector TBEN-LL-4FDI-4FDX



Type	TBEN-LL-4FDI-4FDX
ID	100039886
Supply	
Supply voltage	24 VDC
Admissible range	20.4...28.8 VDC
Voltage supply connection	M12, L-coded
Operating current	V1: max. 150 mA
Electrical isolation	galvanic isolation of the voltage groups V1 and V2, voltages up to 500 VAC
Power dissipation, typical	≤ 5 W
System data	
Fieldbus transmission rate	10/100 Mbps
Fieldbus connection technology	2 × M12, 4-pin, D-coded
Protocol detection	automatic
Service interface	Ethernet via XF1 or XF2
Modbus TCP	
Addressing	Static IP, DHCP
Supported function codes	FC1, FC2, FC3, FC4, FC6, FC15, FC16, FC23
Number of TCP connections	8
Input register start address	0 (0x0000 hex)
Output register start address	2048 (0x0800 hex)

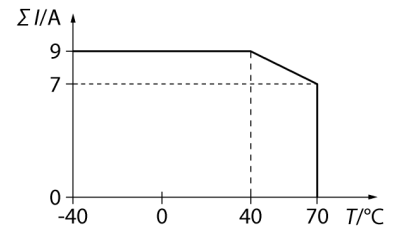
- PROFINET device, EtherNet/IP device or Modbus TCP server
- Integrated Ethernet switch
- Supports 10 Mbps/100 Mbps
- 2 × M12, 4-pin, D-coded, Ethernet fieldbus connection
- Glass fiber reinforced housing
- Shock and vibration tested
- Fully potted module electronics
- Protection classes IP65, IP67, IP69K
- M12, 5-pin, L-coded male connector for power supply
- ATEX zone 2/22
- CCC-Ex
- Four secure digital SIL3 inputs
- Four secure configurable digital SIL3 inputs or outputs

Figure 1



Ethernet/IP	
Addressing	acc. to EtherNet/IP specification
Quick Connect (QC)	< 150 ms
min. RPI	2 ms
Device Level Ring (DLR)	supported
Class 3 connections (TCP)	3
Class 1 connections (CIP)	10
Input Assembly Instance	101
Output Assembly Instance	102
Configuration Assembly Instance	106

Figure 2



PROFINET	
Addressing	DCP
Conformance class	B (RT)
MinCycleTime	1 ms
Fast Start-Up (FSU)	< 150 ms
Diagnostics	acc. to PROFINET alarm handling
Topology detection	supported
Automatic addressing	supported
Media Redundancy Protocol (MRP)	supported

Safety Data	
PL acc. to EN ISO 13849-1	Level e
Category acc. to DIN EN 13849-1:2008	4
MTTF _e gemäß ISO 13849-1:2008	>200 Jahre
DC acc. to ISO 13849-1:2008	99%
SIL acc. to IEC 61508	3
PFH according IEC 61508	< 1* 10E-09 /h
PFD according IEC 61508	< 1* 10E-05
Useful Lifetime	20 years











Safety Inputs OSSD	
Low-level signal voltage	EN 61131-2 type 1 (< 5 V; < 0.5 mA)
High-level signal voltage	EN 61131-2 type 1 (> 15 V; > 2 mA)
Max. OSSD supply per channel	2 A per slot C0 to C7, 1.5 A to 70 °C Please note derating as shown in figure 1
Max. tolerance test pulse width	1 ms
Interval between 2 test pulses, minimum	20 ms to 1 ms test pulse width 15 ms to 0.5 ms test pulse width

Safety Inputs floating/antivalent	
Max. loop resistance	< 150 Ω
Max. cable length	Max. 1 μF to 150 Ω Limited by cable capacity
Test pulse, typical	0.6 ms
Test pulse, maximum	0.8 ms
Sensor supply	Power supply V AUX1/T1 max. 2 A Please note derating as shown in figure 1
Interval between 2 test pulses, minimum	900 ms
Additional information	No connection to external potential allowed

Safety Outputs	
Output current in off state	< 5 V
Output current in off state	< 1 mA
	Suitable for inputs acc. to EN 61131-2 type 1
Test pulse, typical	0.5 ms
Test pulse, maximum	1.25 ms
Interval between 2 test pulses, typical	500 ms
Interval between 2 test pulses, minimum	250 ms
Actuator power supply	Power supply V AUX1/T1 max. 2 A Please note derating as shown in figure 1
Max. output current	2 A (resistive) 1 A (inductive)
Additional information	The load must be mechanically or electrically inert to tolerate the test pulses. When configured as a PPM switching output, the negative terminal of the load must be wired to the M connection of the corresponding output (pin 2).
Connectivity inputs	
Connectivity inputs	M12, 5-pin
Input delay	2.5 ms
Connectivity outputs	
Connectivity outputs	M12, 5-pin
Standard/Directive conformity	
	With request for perusal
Directive	2006/42/EC Machine Directive 2014/30/EC EMC Directive
Safety standard	EN/IEC 61508
Application Standard	EN ISO 13849-1 EN/IEC 62061
Product Standard	IEC 61131-6
Vibration test	Acc. to EN 60068-2-6 Acceleration up to 20 g
Shock test	acc. to EN 60068-2-27
Drop and topple	acc. to EN 60068-2-31/IEC 60068-2-32
Electromagnetic compatibility	Acc. to EN 61131-2
Approvals and certificates	CE UKCA ATEX zone 2/22 CCC-Ex FCC statement, UV resistant acc. to DIN EN ISO 4892-2A (2013)
UL Certificate	cULus LISTED 21 W2, Encl.Type 1 IND.CONT.EQ.
Note on ATEX/IECEx	The Quick Start Guide with information on use in Ex areas must be observed.

General Information	
Dimensions (W x L x H)	60.4 x 230.4 x 34.8 mm
Ambient temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Altitude	Max. 5000 m
Protection class	IP65 IP67 IP69K
Housing material	PA6-GF30
Housing color	Black
Connector material	Nickel-plated brass
Window material	Lexan
Material screw	303 stainless steel
Material label	Polycarbonate
Halogen-free	yes
Mounting	2 mounting holes □ 6.3 mm

The data sheet serves as advance information. For definitive values see the corresponding product manual. In this respect, no liability for completeness and accuracy can be applied to the content of this data sheet.

	<p>Note Ethernet cable (example): RSSD-RSSD-441-2M/S2174 ID 6914218</p>	<p>Ethernet M12 × 1</p>  <p>1 = TX + 2 = RX + 3 = TX - 4 = RX - flange = FE</p> <p>P1</p>  <p>1 = RX + 2 = TX + 3 = RX - 4 = TX - flange = FE</p> <p>P2</p>
	<p>Note Actuator and sensor cable/PUR extension cable (example): RKC4.5T-2-RSC4.5T/TXY ID 6629805</p>	<p>Safety inputs M12 × 1</p>  <p>1 = V_{aux}/T1 2 = FDI (T2) 3 = GND (V1) 4 = FDI (T1) 5 = T2</p>
	<p>Note Actuator and sensor cable/PUR extension cable (example): RKC4.5T-2-RSC4.5T/TXY ID 6629805</p>	<p>Safety I/O slot M12 × 1</p>  <p>1 = V_{aux}/T1 2 = FDO-/FDI (T2) 3 = GND (V1) 4 = FDO+/FDI (T1) 5 = T2</p>
	<p>Note Power supply cable (example): Connection cable, 2 m, straight, 5-pin (4+FE) Type: RKP56PLB-2/TXG ID: 100006303 Extension cable, 2 m, straight, 5-pin (4+FE) Type: RKP56PLB-2-RSP56PLB/TXG ID: 100003327</p>	<p>Power supply, M12, L-coded</p>  <p>1 = 24VDC V1 2 = GND V2 3 = GND V1 4 = 24VDC V2 FE</p> <p>XD1</p>  <p>1 = 24VDC V1 2 = GND V2 3 = GND V1 4 = 24VDC V2 FE</p> <p>XD2</p>

Module Status LED

LED	Color	Status	Description
L/A	Green	On	Ethernet Link (100 Mbps)
		Flashing	Ethernet communication (100 Mbps)
	yellow	On	Ethernet link (10 Mbps)
		Flashing	Ethernet communication (10 Mbps)
		Off	No Ethernet link
BUS	Green	On	Active connection to a master
		Flashing	Steady flashing: Ready Sequence of 3 flashes in 2 seconds: FLC/ARGEE active
	Red	On	IP address conflict or restore mode or Modbus timeout
		Flashing	Blink/Wink command active
	Green/red	Alternating	Autonegotiation and/or waiting for DHCP/Boot-P addressing
		Off	Power off
ERR	Green	On	No diagnostics available
	Red	On	Diagnostics available
			Undervoltage diagnosis response is parameter dependent
PWR	Green	On	V ₊ power supply OK
		Off	V ₊ power supply off or V ₊ undervoltage

LED Status I/O

LED	Color	Status	Description
0...7	Green	On	Channel active
		Flashing	Self-test
	Red	On	Discrepancy
		Flashing	Cross-connection
8...15	Green	On	Channel active
		Flashing	Self-test (input only)
	Red	On	Discrepancy, overload (output only)
		Flashing	Cross-connection

Process Data Mapping of the Single Protocols

For more details on the corresponding protocols see manual.

Accessories

Type code	Ident no.		Dimension drawing
TB-SG-L	100014865	Protective housing for TBEN-L and TBIL-M block I/O modules for use in ATEX Zone 2/22	